




ABC LEISURE GROUP

'Falcon'

69ft Traditional Stern Narrowboat
Luxury specification throughout

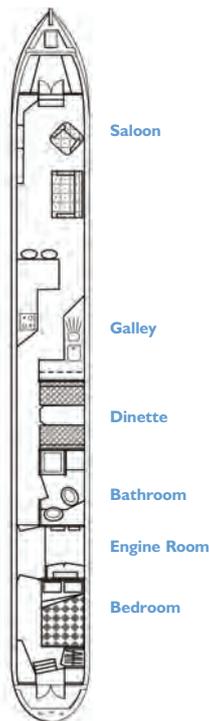

check our other boat sales at: www.abclg.com

Fittings & Specification

Length	69ft Traditional stern narrowboat.
Bottom	10mm
Hull sides	6mm
Cabin sides	5mm
Roof	4mm with 75mm curvature.
Base plate framing	100 x 75 x 8 mm (nominal 635mm centres)
Knees and stringers	60 x 60 x 8mm (nominal 635 mm centres)
Cabin roof bearers	25 x 25 x 2.5 mm box section (nominal 300mm centres)
Rubbing strakes	50mm x 13mm. Convex four at bow. Three at stern including two full length.
Gas locker	Forward locker of a size to contain two 13kg cylinders with retainers.
Weed hatch	Quick release weed hatch.
Rudder & Tiller	50mm diameters stock with tapered top, single bolt fitting. Balanced blade, swans neck 38mm diameter with brass and wooden extension.
External doors	All doors are steel with timber infill panels.
Water Tank	Integral, below self draining well deck. Minimum capacity 850 litres. Two take off points.
Diesel Tank	Integral, main tank nominal capacity 225 litres with anti-spill filler.
Other	Bow tee stud, two stern dollies, centre roof ring, anchor fixing ring in bow, plank and pole rack on roof. Welded steel cants to bow and stern. Traditional 'Alvechurch' style steel handrail.
Berths	Fixed double and dinette/double.
Engine	A Nanni 4.195 KC inboard diesel engine and ARP hydraulic drive unit. The installation package includes – keel cooling, flexible mounts, 100 amp. alternator supplying two starter batteries with a separate 100 amp. alternator supplying four deep cycle cabin batteries, control panel and tachometer, hour meter, keyswitch and engine default warning lights. A stern tube lubricator and bilge pump also fitted. A single lever engine control. The engine is covered and lined with sound insulation. Storage for wet gear in the engine compartment.
Insulation	Lined with 50mm flame retardant polystyrene sheet foam below the gunnels and with 25mm above.
Windows & Doors	Gold anodised, aluminium drop back vent windows are used in combination with brass portholes. All exterior doors are steel fabricated, timber lined and have welded hinges for security.
Water	Water is supplied by two pumps and delivered via concealed polybutylene pipe work. One pump is for hot water that feeds the 30 litre stainless steel calorifier tank. The second pump supplies a large pre-filter for the cold water supply to the sink, shower and basin taps.
Gas	Gas is supplied from two 13kg gas bottles in forward locker via an automatic changeover valve.
240-volt electrics	240-volt electrics supplied by a 12/2500-125 Mastervolt sine wave inverter charger and protected outlet sockets.
Heating	Alde Compact 3010 gas fired boiler with radiator in each cabin (excluding galley) and a chromed towel radiator in bathroom. Heating system can be isolated to provide only hot water.
Internals	Floors are laid in 18mm treated far eastern plywood laid on treated bearers. Hull and cabin sides are lined in 9mm varnished ash ply. Headlining is 9mm ash tongue and groove. Bulkheads and internal doors are constructed from 18mm ash blockboard. All wood surfaces treated with 4 coats of varnish. A hardwood veneered floor covering is laid on top of the ply in all areas except the bathroom where cream/marble effect laminate floor tiles are laid.
Painting	The hull has two coats of bitumen based paint up to the top rubbing strake. All other surfaces are primed followed by an undercoat and further two coats of gloss.
Ballast	Concrete paving slabs placed under floor as required by design and trim.
Bedroom	Pull out 4ft 6" double bed with cupboards over and draws under, wardrobe and vanity top. Cupboards have under lighting.
Bathroom	Shower with 12volt electric shower emptying pump, tiled surround and bi-folding shower screen. Vanity unit with semi-recessed basin set in LG HI-MACS® surface. Electric flush toilet with remote tank.
Galley	Stainless steel finished four burner gas hob, oven and grill. 12-volt electric fridge. Base units house two pull out storage racks, cupboard doors and drawers are soft closing. A double cupboard with glass panelled wooded framed doors and under cupboard lighting is fitted to the galley bulkhead. LG HI-MACS® work surface with 1 1/2" under mount sink with mixer tap and filtered drinking water supply. A pullout wine rack is located under the work surface.
Saloon	Large saloon with breakfast bar and stools. Pullout and swivel LCD TV/DVD player. Stereo radio/CD player. Captain's chair and sofa bed.
Dinette	The dinette will convert to a double bed if required.
Safety & Navigation	Bow and stern fenders, three mooring lines. An anchor with chain and warp is fitted in the bow. Internally three fire extinguishers and fire blanket.
Ventilation	Ventilation in accordance with current legislation, with due regard to appliances and use.

Please contact us to receive a copy of the boat review by Graham Booth, Technical Editor of Waterways World.

Photographs and layout are supplied courtesy of Waterways World.

Supplied with documentation in accordance with the European Pleasure Craft Directive and UK Boat Safety Scheme requirements.